PV STREETLIGHTS

PV STREET-LIGHTS

Self powered solar light poles with quick installation times. Our PV Street-Lights are designed to have a life span of over 30 - 40 years. The solar panels are manufactured directly onto the pole structure and the batteries are secured inside the pole structure. Our light poles have a sleek modern look, that can be installed almost anywhere!

A true economic solution to remote lighting applications.

HIGHLIGHTS


- BIPV (PV built-in to the pole)
- Self-powered with long life energy storage
- No trenching or wiring with super quick install times
- Emergency lighting that never go out
- Remote Monitoring Services

KEY FEATURES

EFFICIENT LED LIGHTING	180 W/L
BATTERY TECHNOLOGY	Carbon Lead
BATTERY LIFE	20+ Years
PV PANEL LIFE	30+ Years
WARRANTY	5 Years
OPTIONAL WARRANTY	10 Year
MONITORING	Internet



DATA SHEET SINGLE LIGHTING MODELS

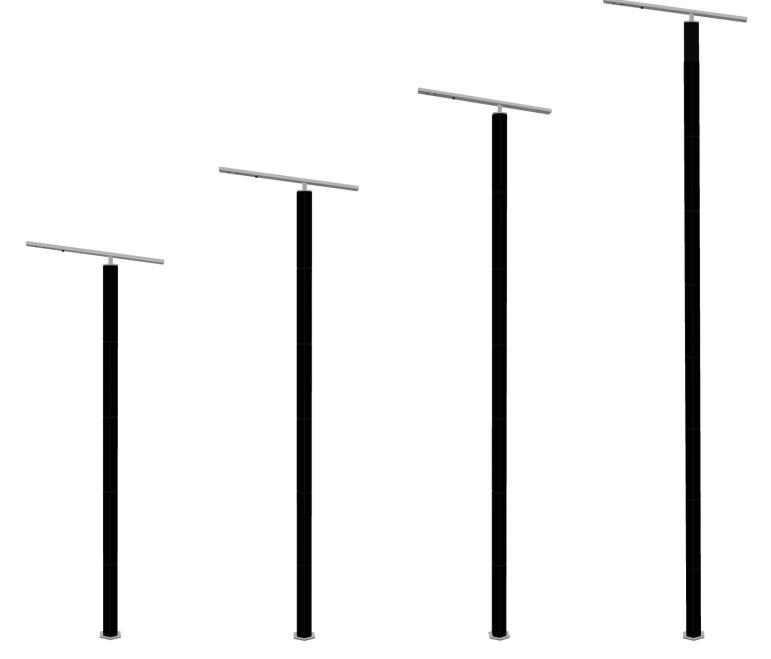

PV STREET-LIGHT
Model: HEX1425S


PV STREET-LIGHT
Model: HEX1430S

PV STREET-LIGHT Model: HEX1435S

PV STREET-LIGHT Model: HEX1440S

Lighting	Lighting	Lighting	Lighting	
High Efficiency LED: 180L/W				
Battery Voltage: 24VDC	Battery Voltage: 24VDC	Battery Voltage: 24VDC	Battery Voltage: 24VDC	
Rated Load 60W	Rated Load 80W	Rated Load 100W	Rated Load 120W	
Pole Specs	Pole Specs	Pole Specs	Pole Specs	
Pole Height: 25'	Pole Height: 30'	Pole Height: 35'	Pole Height: 40'	
Pole Width: 14"	Pole Width: 14"	Pole Width: 14"	Pole Width: 14"	
Pole Shaft: A-500 GR. B				
Finish: Tempered Glass	Finish: Tempered Glass	Finish: Tempered Glass	Finish: Tempered Glass	
Warranty	Warranty	Warranty	Warranty	
Comes with 5 Year Warranty				
Up-gradable to 10 Year Warranty				

DATA SHEET DUAL LIGHTING MODELS

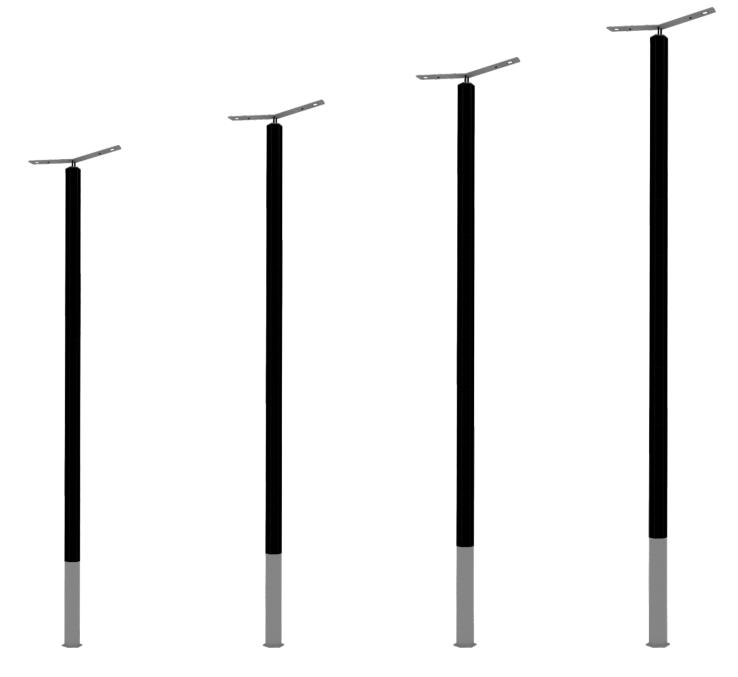

PV HIWAY-LIGHT Model: HEX1735D

P٧	Η	IV	VA	Y	-L	IG	H.

T PV HIWAY-LIGHT PV HIWAY-LIGHT

Model: HEX1735D		Model: HEX1740D		Model: HEX1745D		Model: HEX1750D	
Lighting		Lighting		Lighting		Lighting	
High Efficiency LED: 18	80L/W	High Efficiency LE	D: 180L/W	High Efficiency LE	D: 180L/W	High Efficiency LE	D: 180L/W
Battery Voltage: 2	4VDC	Battery Voltage:	24VDC	Battery Voltage:	24VDC	Battery Voltage:	24VDC
Rated Load	120W	Rated Load	140W	Rated Load	160W	Rated Load	200W
Pole Specs		Pole Specs		Pole Specs		Pole Specs	
Pole Height:	35'	Pole Height:	40'	Pole Height:	45'	Pole Height:	50'
Pole Width:	17"	Pole Width:	17"	Pole Width:	17"	Pole Width:	17"
BIPV Solar: A-500	GR. B	Pole Shaft:	A-500 GR. B	Pole Shaft:	A-500 GR. B	Pole Shaft:	A-500 GR. B
Finish: Galva	anized	Finish:	Galvanized	Finish:	Galvanized	Finish:	Galvanized
Warranty		Warranty		Warranty		Warranty	
Comes with 5 Year Warranty		Comes with 5 Year Warranty		Comes with 5 Year Warranty		Comes with 5 Year Warranty	
Up-gradable to 10 Year Warranty		Up-gradable to 10 Year Warranty		Up-gradable to 10 Year Warranty		Up-gradable to 10 Year Warranty	

PV PATHLIGHTS

PV PATH-LIGHTS

Self powered solar light poles with quick installation times. Our PV Street-Lights are designed to have a life span of over 25 years. The solar panels are manufactured directly onto the pole structure and the batteries are secured inside the pole structure. Our light poles have a sleek modern look, that can be installed almost anywhere!


A true economic solution to remote lighting applications.

HIGHLIGHTS

- BIPV (PV built-in to the pole)
- Self-powered with long life energy storage
- No trenching or wiring with super quick install times
- Excellent for emergency lights that never go out
- Remote Monitoring Services


KEY FEATURES

EFFICIENT LED LIGHTING	180 W/L
BATTERY TECHNOLOGY	Carbon Lead
BATTERY LIFE	20+ Years
PV PANEL LIFE	30+ Years
WARRANTY	5 Years
OPTIONAL WARRANTY	10 Year
MONITORING	Internet

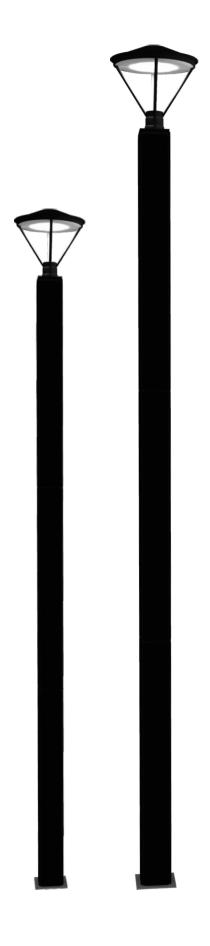



DATA SHEET PATH LIGHTING MODELS

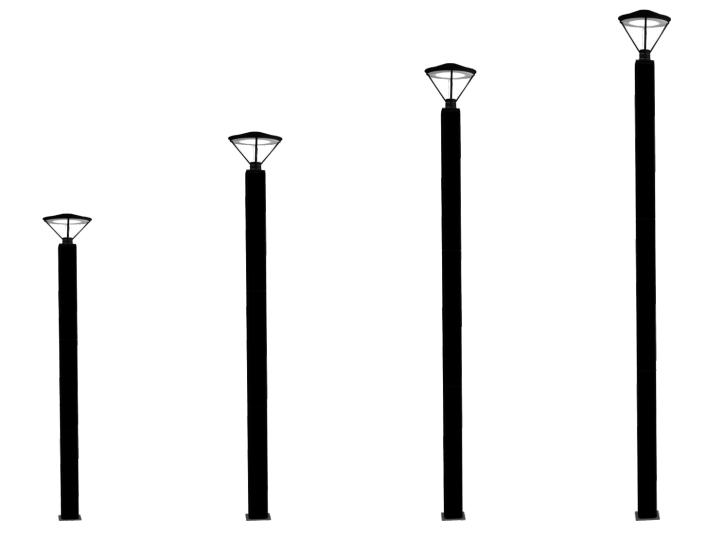

PV PATH-LIGHT

Model: SQ810S	-	Model: SQ815S		Model: SQ820S		Model: SQ825S	
Lighting		Lighting		Lighting		Lighting	
High Efficiency L	ED: 180L/W	High Efficiency L	ED: 180L/W	High Efficiency L	ED: 180L/W	High Efficiency I	LED: 180L/W
Battery Voltage:	24VDC						
Rated Load	15W	Rated Load	25W	Rated Load	40W	Rated Load	50W
Pole Specs		Pole Specs		Pole Specs		Pole Specs	
Pole Height:	10'	Pole Height:	15'	Pole Height:	20'	Pole Height:	25'
Pole Width:	8"						
Pole Shaft:	A-500 GR. B						
Finish:	Galvanized	Finish:	Galvanized	Finish:	Galvanized	Finish:	Galvanized
Warranty		Warranty		Warranty		Warranty	
Comes with 5 Year Warranty		Comes with 5 Year Warranty		Comes with 5 Year Warranty		Comes with 5 Year Warranty	
Up-gradable to 10 Year Warranty		Up-gradable to 10 Year Warranty		Up-gradable to 10 Year Warranty		Up-gradable to 10 Year Warranty	

PV PATH-LIGHT

PV PATH-LIGHT

PV PATH-LIGHT